


Dimensiones en mm.
Dimensions in mm.

	A	B	C	D	E	F	G	H	I	Kg
Nadorself 200	339	408.5	125	140	245.5	36.5	533.5	101	102.5	26/24
Nadorself 300	339	408.5	125	140	245.5	36.5	533.5	101	102.5	28/26
Nadorself 400	339	408.5	125	140	245.5	36.5	533.5	101	102.5	28

Curvas de funcionamiento a 3450 r.p.m.
Performance curves at 3450 r.p.m.

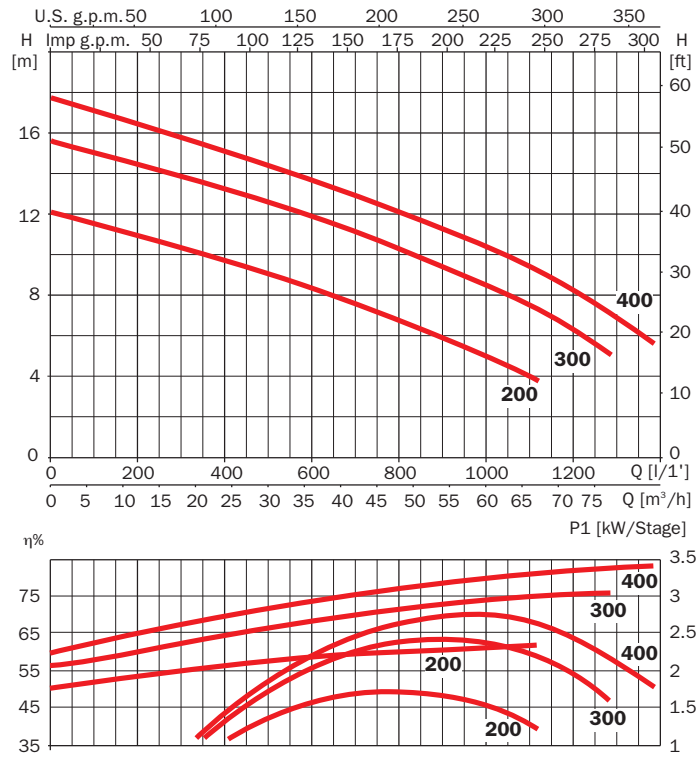

Características eléctricas
Electrical features

Modelo/Model 60 Hz	HP	kW	Fases Phases	Voltaje Volts	P1 (kW)	A	μF
Nadorself 200/1220	2,0	1,5	1	220	2,3	11	30
Nadorself 200/3220/440	2,0	1,5	3	220-254/380-440	2,3	6,7/6,6/4/3,9	-
Nadorself 300/1220	3,0	2,3	1	220	2,9	13	60
Nadorself 300/3220/440	3,0	2,3	3	220-254/380-440	2,9	8,5/8,4/4,9/4,9	-
Nadorself 400/1220	4,0	3	1	220	3,4	14,9	60
Nadorself 400/3220/440	4,0	3	3	220-254/380-440	3,4	10,2/10,1/5,9/5,8	-

Altura manométrica en metros/ft
Manometric head in meters/ft

	4 mt 13,12 ft	6 mts 19,69 ft	8 mts 26,24 ft	10 mts 32,80 ft	12 mts 39,36 ft	14 mts 49,52 ft	16 mts 52,49 ft
GASTO en m³/h FLOW in m³/h'	66	54	38,5	21,5			
	66	54	38,5	21,5			
		73,5	63	50	35	15	
		73,5	63	50	35	15	
		82	73	63	48	33	16
		82	73	63	48	33	16