

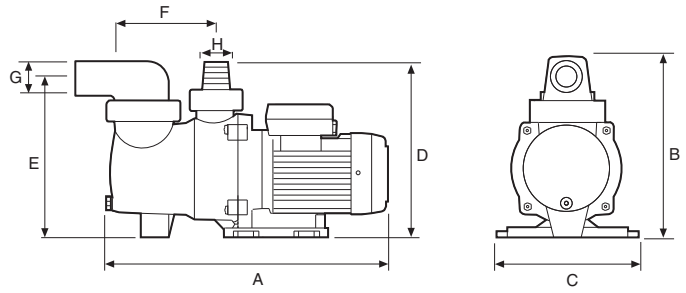
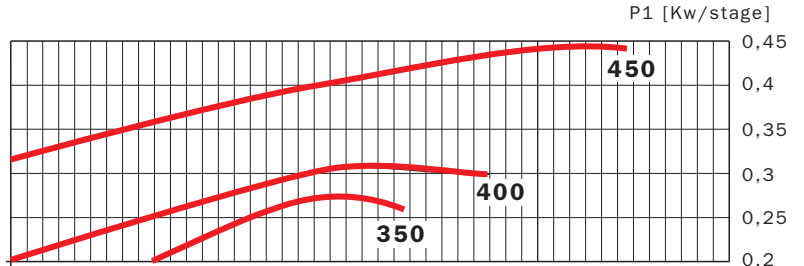


Niper

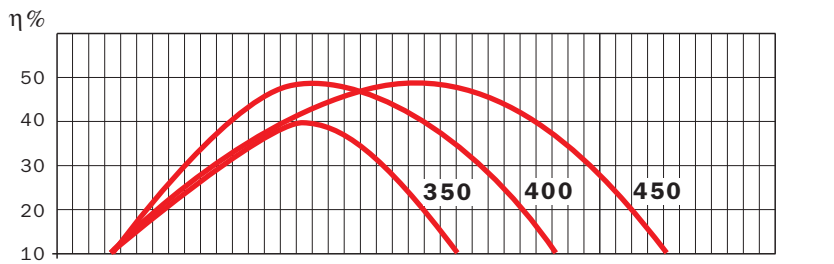

	A	B	C	D	E	F	G	H	Kg
Niper 1 350	405	262	204	250	231	158	40	40	5,1
Niper 2 400	405	262	204	250	231	158	40	40/50	5,1
Niper 2 450	415	262	204	250	231	158	40	40/50	5,8

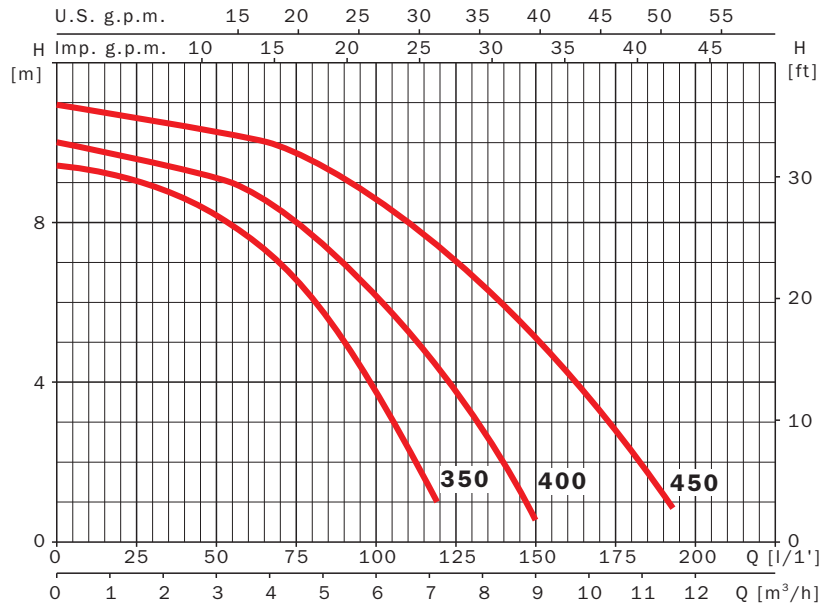

Curvas de funcionamiento a 3450 r.p.m.
 Performance curves at 3450 r.p.m.

Modelo/Model 60 Hz	HP	kW	Fases Phases	Voltaje Volts	P1 (kW)	A	μF
Niper 1 350M/1115	0,25	0,18	1	115	0,27	2,4	12
Niper 1 350M/1220	0,25	0,18	1	220	0,27	1,34	6
Niper 2 400/1115	0,25	0,18	1	115	0,32	3,0	12
Niper 2 400/1220	0,25	0,18	1	220	0,32	1,53	6
Niper 2 450/1115	0,33	0,25	1	115	0,43	4,4	30
Niper 2 450/1220	0,33	0,25	1	220	0,43	1,97	12

GASTO en litros por minuto FLOW in litres per minute	1 mts 3.28 ft	3 mts 9.84 ft	5 mts 16.40 ft	8 mts 26.25 ft	10 mts 32.80 ft
	120	105	90	53	
120	105	90	53		
146	130	113	75	3	
146	130	113	75	3	
192	173	150	110	65	
192	173	150	110	65	