


> **VIGILARAIN 1250**

Single stage submersible pump with outer casing, suction filter, motor housing and discharge body in stainless steel AISI 304. Impeller in rubber reinforced with bichromed iron. Directional and pump foot in glass loaded polypropilen. O´rings in NBR and mechanical seal in silicon carbide/alumine oxide.

Asynchronous, two poles motor, IP 68 protection and Class F insulation. Single phase version, 230V 50 Hz., with thermal protection.

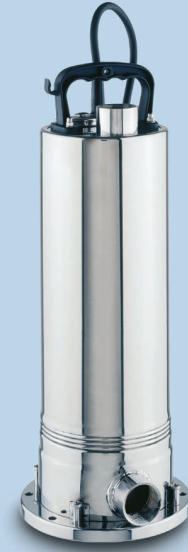

> Technical features

	FLOW	MANOMETRIC HEAD	MOTOR POWER	SUCTION AND DISCHARGE Ø
Vigilarain 1250	Up to 16 m ³ /h	Up to 13.2 m.c.w.	1.2 HP – 0.9 kW	1 1/4"